
GO HexStage 1

Precise & Powerful 6-Axis Motion

Nanometer Resolution Motion in 6 DOF

The PRECIBEO GO HexStage 1 is based on the precise and powerful GO Stages, which makes the GO HexStage lift up to 1 kg or 2,5 kg and be self-locking at rest.

The PRECIBEO GO HexStage 1 is easily controlled through two daisy chained GO Controllers and the GO HexMotion Windows App. C++ DLLs are available for easy programmatic integration.

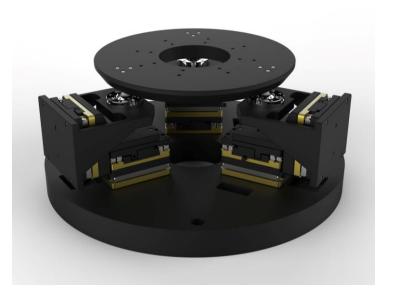

Technical Specification

MODEL	GO HEXSTAGE 1 – 15 N	GO HEXSTAGE 1 – 30 N
POSITIONING		
TRAVEL (X, Y, Z)	+-10 mm	
TRAVEL Θ(X, Y, Z)	+-10°	
MIN INCREMENTAL MOTION (X, Y, Z)	2 nm	
MIN INCREMENTAL MOTION $\Theta(X,Y,Z)$	< 0,1 μrad	
REPEATABILITY (X, Y, Z)	+- 200 nm	
REPEATABILITY Θ(X, Y, Z)	+- 15 μrad	
MOTION		
MAX OPERATING FORCE (PUSH / PULL)	(X) 10 N / (Y) 8 N / (Z) 15 N	(X) 10 N / (Y) 8 N / (Z) 30 N
HOLDING FORCE (WHEN POWER IS OFF)	(X) 12 N / (Y) 10 N / (Z) 18 N	(X) 12 N / (Y) 10 N / (Z) 33 N
MAX SPEED AT NO LOAD (X, Y, Z)	8 mm/s	8 mm/s
MAX Z SPEED WITH MAX LOAD ON TOP	> 5 mm/s	> 1 mm/s
DRIVE TYPE		
HEXSTAGE BASE MODULE	PRECIBEO GO Linear Stage LS4545	
MECHANICAL		
MAX LOAD CENTERED ON TOP PLATE	1 kg	2,5 kg
DIAMETER	220 mm	
HEIGHT	85-105 mm	
MISCELLANEOUS		
CABLE FROM EACH OF THE 6 GO STAGES	2 m cable (+-5%) with ix Industrial™ connector	
MATERIAL	Aluminum	

Order Information

Please contact us by phone (<u>+46 18 700 13 40</u>) or email (<u>sales@precibeo.com</u>) for any enquiries.

PRODUCT	DESCRIPTION		
GO-HEX1-15	One GO HexStage 1 with 15 N Z-push/pull-force and Cables and Connectors including:		
	 2 daisy chained GO Controllers with USB cable for connection with host computer. 		
GO-HEX1-30	One GO HexStage 1 with 30 N Z-push/pull-force and Cables and Connectors including:		
	 2 daisy chained GO Controllers with USB cable for connection with host computer. 		

Disclaimer: Specifications of the product do not constitute a warranty of the properties. They are intended for information purposes only and are subject to change.

